

**BOXER 42XL BI-ACTIVE**  
**VACUUM PACKAGING MACHINE**



**FEATURES**

- Standard with 1 seal bar (front): 420 mm
- Standard with bi-active seal (two wires of 5 mm each).
- Pump capacity: 21 m<sup>3</sup>/h Busch vacuum pump
- Pump maintenance and cleaning program
- Machine cycle: 15-35 sec
- Standard Digital control with Time control and a 10 program memory
- Standard Soft Air to protect the product and vacuum bag
- Deep drawn stainless steel vacuum chamber
- Stainless steel exterior and aluminium lid with a sight glass
- Comes with insert plate for a faster cycle and product adjustment

**OPTIONS**

- ESD configuration (only available in combination with Bi-active seal)
- Sensor control
- Advanced Control System
- Liquid control
- Gas flush

**ACCESSORIES**

- Zebra ZD410 thermal label printer (only in combination with Advanced Control System)
- Inclined insert plate (for packing liquids)
- Food container adaptor
- Service kit for standard maintenance
- Trolley with shelves

**DESCRIPTION**

The robust, stainless steel Boxer 42XL Bi-active vacuum packaging machine is standard equipped with a Busch vacuum pump and Digital control with a 10 program memory. This table-top model complies with CE standards.




Henkelman offers standard 3 year warranty.

# VACUUM PACAGING MACHINE BOXER 42XL BA – SPECS

VACUUM PACKAGING MACHINE BOXER 42XL BA – SPEC SHEET

## DIMENSIONS

In mm

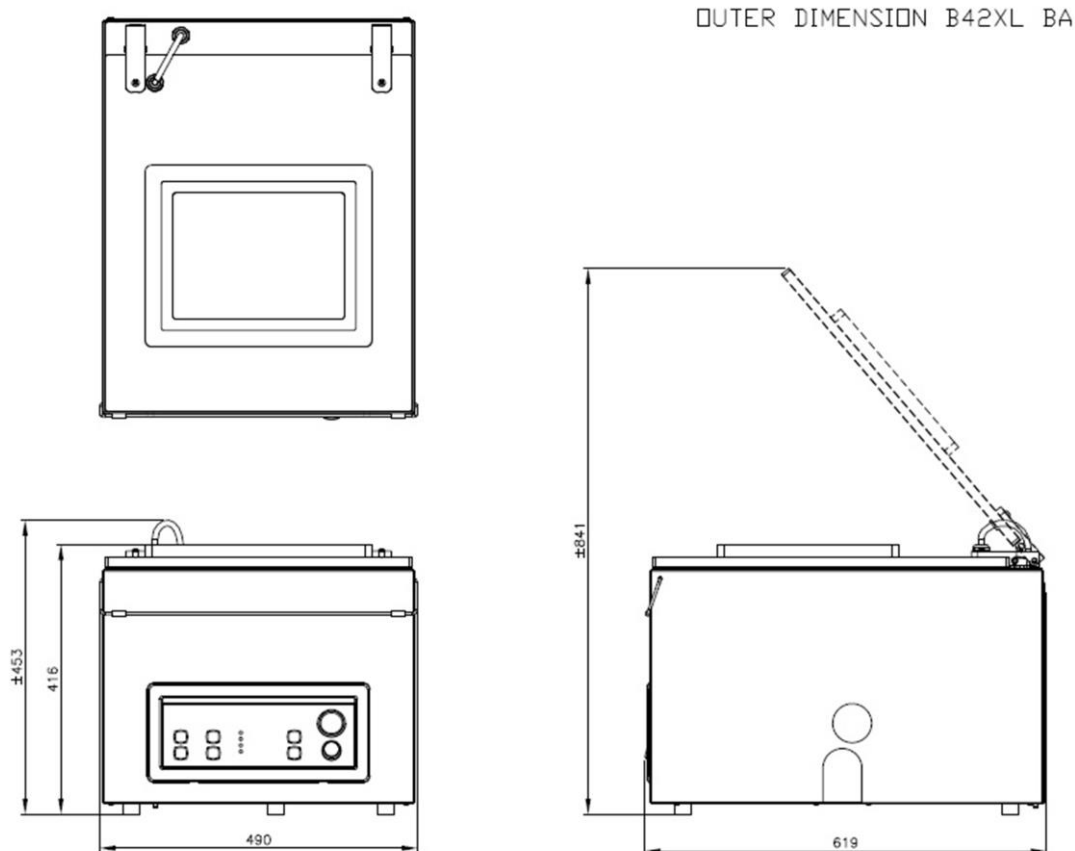

Model	Dimensions (mm)		Voltage* (Hz)	Pump capacity (m <sup>3</sup> /h)	Power (kW)	Weight (kg)
	Chamber (usable space) L x W x H	Machine L x W x H				
Boxer 42XL BA	460 x 420 x 120	620 x 490 x 453	230V-1-50	21	0,75 – 1,0	72
* Other voltages available						



**HENKELMAN BV**  
Titaniumlaan 10  
5221 CK 's-Hertogenbosch  
The Netherlands

**Sales support**  
P +31 73 621 36 71  
E [info@henkelman.com](mailto:info@henkelman.com)  
**Service/technical support**  
P +31 73 621 36 71  
E [service@henkelman.com](mailto:service@henkelman.com)